



**GAS COMPONENTS**



**ELECTRIC COMPONENTS**



**WATER TECHNOLOGY**



**MECHANICAL COMPONENTS**



**TOOLS**

Spare parts suitable for

**FRIGINOX**

Find the complete and up-to-date range of products in our GEV Webshop



# Manufacturer catalogue

The most important spare parts and accessories arranged clearly for every manufacturer

- ✓ Complete product range and all appliance data always up to date in the GEV Webshop
- ✓ Alphabetical Index at the end of the catalogue

## GEV Webshop

[www.gev-online.co.uk](http://www.gev-online.co.uk)

[www.gev-online.com](http://www.gev-online.com)



- 🔍 Add to Favourites
- 🔍 Sign In with email address and usual password
- 🔍 Easy-order – place several items in your basket at the same time
- 🔍 Quick Item search – no login needed



## switches and momentary switches

### rocker/momentary rocker switches

30x22mm



<b>GEV No.</b>	347791	<b>Ref. No.</b>	FX95040128
<b>description</b>	rocker switch mounting measurements 30x22mm green 2NO 230V 20A illuminated 0-I connection male faston 6.3mm ambient temperature max. 125/55°C protection IP65 with rubber collar		

### microswitches

with push button

switches with snap-fit



<b>GEV No.</b>	348008	<b>Ref. No.</b>	FX95033270
<b>description</b>	microswitch with push button 250V 2.5A 1NO/1NC connection male faston 2.8mm/6.3mm L 27mm L1 22mm ambient temperature max. 104°C actuating force: 180g		

## electronic controllers

### ELIWELL

universal controllers

built-in version



<b>GEV No.</b>	379690	<b>Ref. No.</b>	FX95040265
<b>description</b>	electronic controller ELIWELL type ICPlus902 model ICP16D0750000 mounting measurements 71x29mm 230V voltage AC NTC/PTC relay outputs 1 CO-15A(8) NTC/PTC built-in depth 60mm defr. funct. -50 up to +150°C display 3½ digits		
<b>accessories for</b>	379690		
	<b>GEV No.</b>	378194	<b>Ref. No.</b> —
	temperature probe NTC 10kOhm cable PVC probe -20 up to +80°C cable -10 up to 100°C probe ø7x24.5mm cable length 1.5m without screw connection 2-wire		
	<b>GEV No.</b>	379052	<b>Ref. No.</b> —
	temperature probe PTC 1kOhm cable silicone probe -50 up to +150°C cable -50 up to +180°C probe ø6x40mm cable length 1.5m without screw connection 2-wire		
	<b>GEV No.</b>	379053	<b>Ref. No.</b> —
	temperature probe PTC 1kOhm cable PVC probe -50 up to +150°C cable -10 up to 100°C probe ø6x30mm cable length 3m without screw connection 2-wire		
	<b>GEV No.</b>	379057	<b>Ref. No.</b> —
	temperature probe NTC 10kOhm cable PVC probe -20 up to +80°C cable -10 up to 100°C probe ø6x25mm cable length 3m 2-wire		

<b>accessories for</b>	379690		
	<b>GEV No.</b>	379064	<b>Ref. No.</b> —
	temperature probe PTC 1kOhm cable silicone probe -50 up to +150°C cable -50 up to +180°C probe ø6x40mm cable length 3m without screw connection 2-wire		
	<b>GEV No.</b>	379142	<b>Ref. No.</b> —
	temperature probe PTC 1kOhm cable PVC probe -50 up to +150°C cable -10 up to 100°C probe ø6x30mm cable length 1.5m without screw connection 2-wire		
	<b>GEV No.</b>	379160	<b>Ref. No.</b> —
	temperature probe NTC 10kOhm cable thermoplastic probe -40 up to +110°C cable -40 up to +110°C probe ø6x14mm cable length 1.5m without screw connection 2-wire		
	<b>GEV No.</b>	379161	<b>Ref. No.</b> —
	temperature probe NTC 10kOhm cable thermoplastic probe -40 up to +110°C cable -40 up to +110°C probe ø6x14mm cable length 3m without screw connection 2-wire		
	<b>GEV No.</b>	379343	<b>Ref. No.</b> —
	temperature probe NTC 10kOhm cable silicone probe -40 up to +110°C cable -50 up to +180°C probe ø6x40mm cable length 3m 2-wire		
	<b>GEV No.</b>	379458	<b>Ref. No.</b> —
	temperature probe NTC 10kOhm cable silicone probe -40 up to +110°C cable -50 up to +180°C probe ø6x40mm cable length 1.5m without screw connection 2-wire		
	<b>GEV No.</b>	379781	<b>Ref. No.</b> —
	temperature probe PTC 1kOhm cable thermoplastic probe -50 up to +150°C cable -40 up to +110°C probe ø6x14mm cable length 1.5m without screw connection 2-wire		
	<b>GEV No.</b>	379782	<b>Ref. No.</b> —
	temperature probe PTC 1kOhm cable thermoplastic probe -50 up to +150°C cable -40 up to +110°C probe ø6x14mm cable length 3m 2-wire resistor 1kOhm		

### refrigeration controllers












built-in version



<b>GEV No.</b>	378298	<b>Ref. No.</b>	FX95040273
<b>description</b>	electronic controller ELIWELL type IDPlus 961 model IDP17D0700000 mounting measurements 71x29mm 230V voltage AC NTC/PTC/Pt1000 relay outputs 1 NO-12A(12) NTC/PTC/Pt1000 front measurements 74x32mm built-in depth 67mm protection IP65 -55 up to +150°C display 3½ digits		
<b>accessories for</b>	378298		
	<b>GEV No.</b>	379052	<b>Ref. No.</b> —
	temperature probe PTC 1kOhm cable silicone probe -50 up to +150°C cable -50 up to +180°C probe ø6x40mm cable length 1.5m without screw connection 2-wire		
	<b>GEV No.</b>	379053	<b>Ref. No.</b> —
	temperature probe PTC 1kOhm cable PVC probe -50 up to +150°C cable -10 up to 100°C probe ø6x30mm cable length 3m without screw connection 2-wire		
	<b>GEV No.</b>	379064	<b>Ref. No.</b> —
	temperature probe PTC 1kOhm cable silicone probe -50 up to +150°C cable -50 up to +180°C probe ø6x40mm cable length 3m without screw connection 2-wire		

Table continues overleaf



accessories for		378298	
GEV No.	379142	Ref. No.	—
	temperature probe PTC 1kOhm cable PVC probe -50 up to +150°C cable -10 up to 100°C probe ø6x30mm cable length 1.5m without screw connection 2-wire		
	temperature probe NTC 10kOhm cable thermoplastic probe -40 up to +110°C cable -40 up to +110°C probe ø6x14mm cable length 1.5m without screw connection 2-wire		
	temperature probe NTC 10kOhm cable thermoplastic probe -40 up to +110°C cable -40 up to +110°C probe ø6x14mm cable length 3m without screw connection 2-wire		
	temperature probe NTC 10kOhm cable thermoplastic probe -40 up to +110°C cable -40 up to +110°C probe ø6x14mm cable length 6m 2-wire		
	temperature probe NTC 10kOhm cable thermoplastic probe -40 up to +110°C cable -40 up to +110°C probe ø6x14mm cable length 2m without screw connection 2-wire		
	temperature probe PTC 1kOhm cable PVC probe -50 up to +150°C cable -10 up to 100°C probe ø6x30mm cable length 5m without screw connection 2-wire		
	temperature probe NTC 10kOhm cable silicone probe -40 up to +110°C cable -50 up to +180°C probe ø6x40mm cable length 3m 2-wire		
	temperature probe NTC 10kOhm cable silicone probe -40 up to +110°C cable -50 up to +180°C probe ø6x40mm cable length 1.5m without screw connection 2-wire		
	temperature probe NTC 10kOhm cable thermoplastic probe -40 up to +110°C cable -40 up to +110°C probe ø6x14mm cable length 2.5m without screw connection 2-wire resistor 10kOhm		
	protector for electronic controller 71x29 L 93mm W 65mm plexiglas		
	temperature probe Pt1000 probe -50 up to +110°C cable silicone°C probe ø5x20mm cable length 3m protection IP68		

## compressors

## EMBRACO / ASPERA

R404a/R507

HMBP monophase

High/Medium evaporation temperature above -20/-15 °C



1

GEV No.	605161	Ref. No.	FX95055832
description	compressor coolant R404a/R507 type NEK6210GK 220-240V 50Hz HMBP fully hermetic 8.5kg 3/8HP cylinder capacity 8.78cm <sup>3</sup> CSIR H 200mmW 566W 674W 815W 988W 1195W 1435W 1707W		

## L'UNITE HERMETIQUE / TECUMSEH

R404A

HMBP monophase

High/Medium evaporation temperature above -20/-15 °C



1

GEV No.	605151	Ref. No.	FX95055945
description	compressor coolant R404A type AE4440Z-FZ 220-240V 50Hz HMBP 10.5kg 1/3HP cylinder capacity 6.69cm <sup>3</sup> CSIR H 206mmWWW 433W 546W 676W 826W 1000W 1199W test method EN 12900 ambient temperature max. 45°C		




## locks

### edgemount latches

#### handle latches

#### CAFF/FERMOD

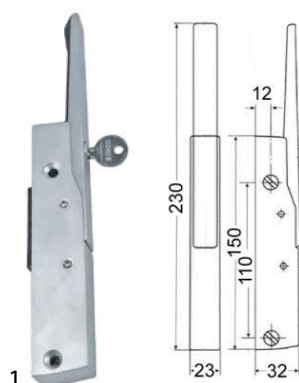


<b>GEV No.</b>	690456	<b>Ref. No.</b>	FX95040124
<b>description</b>	handle latch L 150mm mounting distance 110mm matt chrome-plated lockable refrigeration units 571 R-L CT 26mm complete with door catch		
<b>spare parts for</b>	690456		
	<b>GEV No.</b>	690429	<b>Ref. No.</b> —
	door catch CT 25.5mm		
<b>accessories for</b>	690456		
	<b>GEV No.</b>	690428	<b>Ref. No.</b> —
	door catch H 51mm W 13.9mm mounting distance 30mm plastic CT 16.5mm		
	<b>GEV No.</b>	690445	<b>Ref. No.</b> —
	base plate H 2mm		
	<b>GEV No.</b>	690446	<b>Ref. No.</b> —
	base plate H 5mm L 56mm W 18mm		

## hinges

### edgemount hinges

#### CAFF/FERMOD

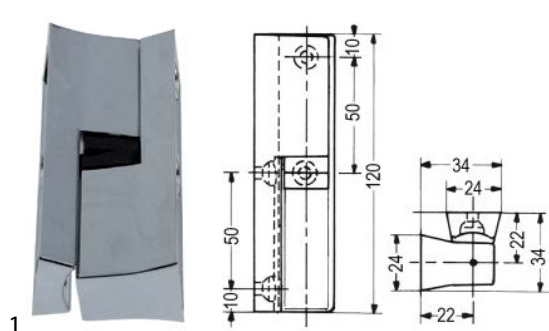


<b>GEV No.</b>	700565	<b>Ref. No.</b>	FX95014445
<b>description</b>	edgemount hinge L 120mm W 24mm mounting distance 50/50mm hinging left/right without lift series G 308		
<b>accessories for</b>	700565		
	<b>GEV No.</b>	690411	<b>Ref. No.</b> —
	base plate for type 308 thickness 8mm		

## spring assisted hinges

#### universal

#### CAFF/FERMOD

#### group 2

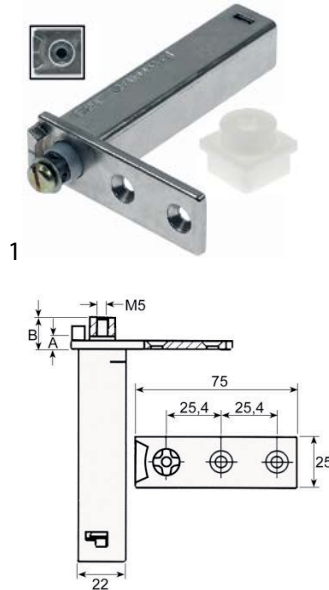

<b>GEV No.</b>	690494	<b>Ref. No.</b>	95014601 fx95014601
<b>description</b>	spring assisted hinge series 175 mounting pos. left/right torx L 75mm W 25.6mm H 100mm A 4mm B 11mm mounting measurements 22x22mm intake torx refrigeration units mounting distance 25mm		

## door bearing




<b>GEV No.</b>	690583	<b>Ref. No.</b>	—
<b>description</b>	hinge bearing without bolt		

**gaskets**


**refrigeration gaskets**

**plug-in gaskets**


**profile 9800**




<b>GEV No.</b>	901815	<b>Ref. No.</b>	FX95030516
<b>description</b>	refrigeration gasket profile 9800 W 200mm L 362mm		




<b>GEV No.</b>	901598	<b>Ref. No.</b>	FX95030151
<b>description</b>	refrigeration gasket profile 9800 W 355mm L 630mm plug size		



<b>GEV No.</b>	901816	<b>Ref. No.</b>	FX95030136
<b>description</b>	refrigeration gasket profile 9800 W 425mm L 626mm plug size W 455 length 658 external size		



<b>GEV No.</b>	901599	<b>Ref. No.</b>	FX95016523
<b>description</b>	refrigeration gasket profile 9800 W 560mm L 1525mm plug size		



<b>GEV No.</b>	901600	<b>Ref. No.</b>	FX95033163
<b>description</b>	refrigeration gasket profile 9800 W 640mm L 725mm plug size		

mechanical components, equipment accessories

**C**

compressors 4

**E**

edgemount hinges 5

edgemount latches 5

electronic controllers 3

**H**

handle latches 5

**M**

microswitches 3

**P**

plug-in gaskets 6

**R**

refrigeration gaskets 6

rocker/momentary rocker switches 3

**S**

spring assisted hinges 5

switches and momentary switches 3