


Find the complete and up-to-date range of products in our GEV Webshop

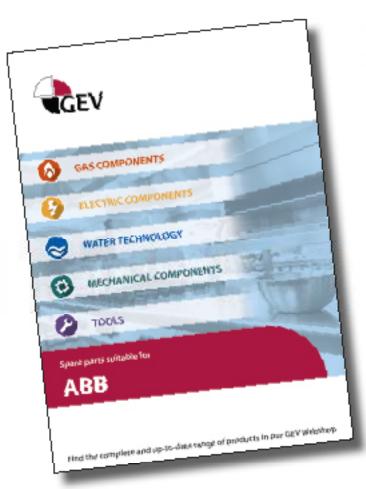

## Manufacturer catalogue

The most important spare parts and accessories arranged clearly for every manufacturer

- Complete product range and all appliance data always up to date in the GEV Webshop
- Alphabetical index at the end of the catalogue

## **GEV Webshop**




- Sign in with email address and usual password
- Easy-order place several items in your basket at the same time
- Quick item search no login needed

#### switches and momentary switches

#### rocker/momentary rocker switches

#### 30x22mm 301002 **GEV** No. 3253 Ref. No. rocker switch mounting measurements 30x22mm orange 2NO 250V 16A illuminated 0-I connection male faston 6.3mm ambient temperadescription ture max. 85/125°C protection IP65 accessories for 301002 GEV No. 301036 Ref. No. protective cover internal size 30x22mm for rocker switch mounting measurementsmm

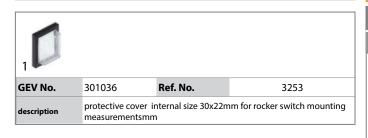

346142	Ref. No.	3	253
rocker switch mounting measurements 30x22mm orange 2NO 250V 16A illuminated 0-I connection male faston 6.3mm ambient temperature max. 85°C protection IP65 with cover cap			
MC6665, RR45A6	6666, RR45PST451	9, RR45S6672	
346142			
GEV No.	301036	Ref. No.	3253
protective cover internal size 30x22mm for rocker switch mounting measurementsmm			
	rocker switch mo 16A illuminated of ture max. 85°C po MC6665, RR45A6 346142 GEV No. protective cover	rocker switch mounting measurer 16A illuminated 0-I connection ma ture max. 85°C protection IP65 wit MC6665, RR45A6666, RR45PST451 346142 GEV No. 301036 protective cover internal size 30x2	rocker switch mounting measurements 30x22mm of 16A illuminated 0-I connection male faston 6.3mm ature max. 85°C protection IP65 with cover cap  MC6665, RR45A6666, RR45PST4519, RR45S6672  346142  GEV No. 301036 Ref. No.  protective cover internal size 30x22mm for rocker sw

#### push/momentary push switches

30x22mm						
GEV No.	301036	Ref. No.	3253			
description	protective cover internal size 30x22mm for rocker switch mounting measurementsmm					

#### microswitches

#### pin-plunger actuated




GEV No.	345105	Ref. No.	00751.2.00.08 3202	
description	microswitch with plunger 250V 16A 1CO connection male faston 6.3mm L 28mm ambient temperature max. 125°C mounting distar 22mm type SM-51 actuating force: 280g black MC6665, RR45A6666			
For models:				

#### relays

#### power relays

#### with male contacts

#### female contact 2.0mm



GEV No.	380358	Ref. No.	01955	5.2.00.08	
description	power relays cor	nnection 2.0 plug-	in connection		
accessories for	380358				
	GEV No.	380378	Ref. No.	_	
B		relay socket 2-pole 55/85 dimensions 70.5x30x27mm 250V voltage AC 10A FINDER manuf. no. 94.72			
S.A.	GEV No.	380384	Ref. No.	_	
-	relay socket 2-po W 23mm for	ole contacts male	faston 2.8mm 250	V voltage AC 10A	
.11	GEV No.	380399	Ref. No.	_	
	relay socket 4-pole dimensions 76.2x27x86.1mm 250V voltage AC 1A				


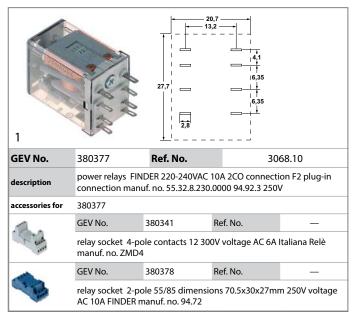


Table continues overleaf



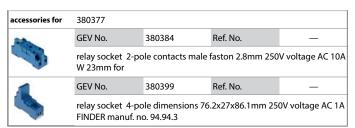

#### motors

#### gear motors

#### for ice-cube maker

#### miscellaneous



GEV No.	499175	Ref. No.	HBM 63C
description			V voltage AC 50Hz shaft ø for flake ice maker 180W

#### pumps

#### booster pumps II

#### pump heads

#### ROSSI



GEV No.	504238	Ref. No.	RF140S
description			DI/h connection 3/8" NPT with e machine shaft ø 4.8x11mm

#### equipment-specific units

#### for coffee grinders

#### grinding burrs

grinding burrs straight

#### standard



GEV No.	527213	Ref. No.	5198
description	,	nm hole ø 4.5mm b	D1 ø 50mm ID ø 30mm H 8mm ore ø 7.5mm mounting ø 40











# 1 GEV No. 527237 Ref. No. 5585 description grinding burrs pair turn direction right D1 ø 68mm D2 ø 49mm H 25mm shaft ø 13mm with flute suitable for ROSSI

grinding burrs conical




screws					
1					
GEV No.	560365	Ref. No.	1256		
description	flat-headed bolt thread M4 thread L 8mm SS DIN 7985/ISO 7045 Qty 1 pcs intake Phillips head ø 8mm head thickness 3mm				
For models:	MC6665, RR45	MC6665, RR45A6666, RR45PST4519, RR45S6672			





springs					
group 1					
1 WWWWWWWWW					
<b>GEV No.</b> 526509 <b>Ref. No.</b> 2020					
description	compression spring ø 8.5mm L 95mm wire gauge ø 0.8mm right				







miscellaneous





# coffee presses coffee presses 1 GEV No. 527549 Ref. No. 2673 description coffee press Ø 57mm H 98mm plastic

# 1 GEV No. 527553 Ref. No. 01772.0.00.01 3321 description sector plates SS For models: MC6665, RR45A6666, RR45S6672


















#### equipment feet and end caps

### equipment feet with stem



#### springs

#### compression springs

1 ill					
GEV No.	526509	Ref. No.	2020		
description compression spring ø 8.5mm L 95mm wire gauge ø 0.8mm right					

1					
GEV No.	527555	Ref. No.	00898.0.00.03 2029		
description	compression spring ø 9.9mm L 80mm wire gauge ø 0.8mm				
For models:	MC6665, RR45A6666, RR45S6672				

#### tension springs



#### fastening material

#### screws

#### flat-headed bolts



GEV No.	560365	Ref. No.	1256		
description	flat-headed bolt thread M4 thread L 8mm S5 DIN 7985/ISO 7045 Qty 1 pcs intake Phillips head ø 8mm head thickness 3mm				
For models:	MC6665, RR45A6666, RR45PST4519, RR45S6672				

#### washers


#### washers

#### DIN 9021



GEV No.	560117	Ref. No.	M1605
description	plain washer ID ø 6.4mm ED ø 18mm DIN 9021 for thread M6		thickness 1.5mm SS Qty 20 pcs



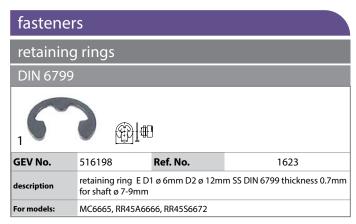

#### В

booster pumps II
F
fasteners
fastening material
flat-headed bolts
M
microswitches
motors
P
pumps
push/momentary push switches
R
relays
retaining rings
rocker/momentary rocker switches
S
screws
switches and momentary switches
w
washers